


RADI-LUGS UL SERIES HEAVY DUTY TWO-HOLE LONG BARREL COPPER TUBE TERMINALS

C2HLB series of two hole long barrel copper tube terminals are made from high purity annealed copper. This product is designed to enhance both mechanical and electrical performance in heavy duty applications. The terminals are electrolytically tin plated to prevent atmospheric corrosion. The product has a maximum operating voltage of 33KV.

This series of product is tested and certified to UL-ZMW, ANSI/UL 486A-486B and ANSI/UL 486C.

PRODUCT DIMENSIONS

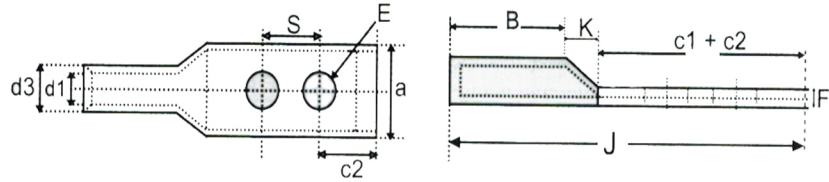

Part Number	Wire AWG	Wire MMSQ	Stud Size	Hole Spacing	Colour Code	d1	d3	J	B	a	F	E	c2	c1+c2	S	K	Strip Length
C2HLB-187	8	10	10	5/8	RED	4.4	6.9	55.5	20.5	10.7	2.0	5.3	7.1	32.0	15.9	3.0	18mm
C2HLB-184	8	10	1/4	5/8		4.4	6.9	55.5	20.5	10.7	2.0	6.4	7.1	32.0	15.9	3.0	18mm
C2HLB-185	6	16	1/4	5/8	BLUE	5.2	7.5	60.0	25.0	10.7	2.1	6.4	7.1	32.0	15.9	3.0	22mm
C2HLB-185A	6	16	1/4	1/2		5.2	7.5	57.0	25.0	10.7	2.1	6.4	7.1	29.0	12.7	3.0	22mm
C2HLB-185B	6	16	1/2	1 3/4		5.2	7.5	104.0	25.0	18.0	3.0	13.0	15.7	76.0	44.5	3.0	22mm
C2HLB-185C	6	16	1/4	3/4		5.2	7.5	63.0	25.0	10.7	2.1	6.4	7.1	35.0	19.1	3.0	22mm
C2HLB-185D	6	16	3/8	1		5.2	7.5	74.0	25.0	10.7	2.1	10.5	9.7	46.0	25.4	3.0	22mm
C2HLB-186	4	25	1/4	5/8	GREY	6.4	8.7	60.0	25.0	12.4	2.2	6.4	7.1	32.0	15.9	3.0	22mm
C2HLB-186A	4	25	3/8	1		6.4	8.7	75.0	25.0	10.7	2.2	10.5	9.7	46.0	25.4	3.0	22mm
C2HLB-186B	4	25	1/4	3/4		6.4	8.7	64.0	25.0	12.4	2.2	6.4	7.1	35.0	19.1	3.0	22mm
C2HLB-187	4	25	1/2	1 3/4		6.4	8.7	104.0	25.0	22.0	3.0	13.0	15.7	76.0	44.5	3.0	22mm
C2HLB-188	2	35	5/16	3/4	BROWN	8.0	10.7	73.0	28.0	15.3	2.6	8.4	8.1	41.0	19.1	4.0	26mm
C2HLB-188A	2	35	3/8	1		8.0	10.7	78.0	28.0	15.3	2.6	10.5	9.7	46.0	25.4	4.0	26mm
C2HLB188B	2	35	1/4	5/8		8.0	10.7	64.0	28.0	15.3	2.6	6.4	7.1	32.0	15.9	4.0	26mm
C2HLB-188C	2	35	1/4	3/4				67.0	28.0	15.3	2.6	6.4	7.1	35.0	19.1	4.0	26mm
C2HLB-189	2	35	5/16	7/8		8.0	10.7	73.0	28.0	15.3	2.6	8.4	8.1	41.0	22.2	4.0	26mm
C2HLB-190	2	35	1/2	1 3/4		8.0	10.7	108.0	28.0	20.5	2.5	13.0	15.7	76.0	44.5	4.0	26mm
C2HLB-191	2	35	1/4	5/8	GREEN	9.1	11.9	65.0	28.0	17.1	2.7	6.4	7.1	32.0	15.9	5.0	26mm
C2HLB-191A	2	35	3/8	1		9.1	11.9	78.0	28.0	17.1	2.7	10.5	9.7	46.0	25.4	5.0	26mm
C2HLB-191B	2	35	1/4	3/4		9.1	11.9	68.0	28.0	17.1	2.7	6.4	7.1	35.0	19.1	5.0	26mm
C2HLB-192	2	35	3/8	7/8		9.1	11.9	74.5	28.0	17.1	2.7	8.4	8.1	41.0	22.2	5.0	26mm
C2HLB-193	2	35	1/2	1 3/4		9.1	11.9	109.0	28.0	19.0	2.5	13.0	15.7	76.0	44.5	5.0	26mm
C2HLB-194	1	50	5/16	7/8	PINK	9.9	13.2	76.5	30.5	18.9	3.2	8.4	8.1	41.0	22.2	5.0	28mm
C2HLB-195	1	50	3/8	1		9.9	13.2	81.5	30.5	18.9	3.2	10.5	9.7	46.0	25.4	5.0	28mm
C2HLB-196	1	50	1/2	1 3/4		9.9	13.2	117.7	30.5	18.9	3.1	13.0	15.7	76.0	44.5	5.0	28mm
C2HLB-197	2/0	70	3/8	1	BLACK	11.2	14.3	87.0	35.0	20.7	3.0	10.5	9.7	46.0	25.4	6.0	33mm
C2HLB-197A	2/0	70	1/4	3/4		11.2	14.3	76.0	35.0	20.7	3.0	6.4	7.1	35.0	19.1	6.0	33mm
C2HLB-198	2/0	70	1/2	1 3/4		11.2	14.3	117.0	35.0	20.7	3.0	13.0	15.7	76.0	44.5	6.0	33mm
C2HLB-199	3/0	95	5/16	1	ORANGE	12.5	15.8	89.0	35.0	22.9	3.2	8.4	8.1	46.0	25.4	8.0	33mm
C2HLB-199A	3/0	95	3/8	1		13	15.8	89.0	35.0	22.9	3.2	10.5	9.7	46.0	25.4	8.0	33mm
C2HLB-1100	3/0	95	3/8	1 3/4		12.5	15.8	118.0	35.0	22.9	3.2	10.5	9.7	76.0	44.5	8.0	33mm
C2HLB-1100A	3/0	95	1/2	1 3/4		12.5	15.8	118.0	35.0	22.9	3.2	13.0	15.7	76.0	44.5	8.0	33mm
C2HLB-1101	4/0	95	3/8	1	PURPLE	13.9	17.5	90.0	36.0	25.4	3.4	10.5	9.7	46.0	25.4	8.0	34mm
C2HLB-1102	4/0	95	1/2	1 3/4		13.9	17.5	120.0	36.0	25.4	3.4	13.0	15.7	76.0	44.5	8.0	34mm
C2HLB-1103	250	120	3/8	1	YELLOW	15.1	19.1	96.0	41.0	27.7	3.8	10.5	9.7	46.0	25.4	9.0	39mm
C2HLB-1104	250	120	1/2	1 3/4		15.1	19.1	126.0	41.0	27.7	3.8	13.0	15.7	76.0	44.5	9.0	39mm
C2HLB-1105	300	150	1/2	1 3/4	WHITE	16.7	20.7	135.0	50.0	30.2	3.8	13.0	15.7	76.0	44.5	9.0	48mm
C2HLB-1106	350	185	1/2	1 3/4	RED	17.8	22.2	137.0	50.0	32.4	4.2	13.0	15.7	76.0	44.5	11.0	48mm
C2HLB-1106A	350	185	3/8	1		17.8	22.2	107.0	50.0	32.4	4.2	10.5	9.7	46.0	25.4	11.0	48mm
C2HLB-1107	400	185	1/2	1 3/4	BLUE	19.4	24.1	139.0	50.0	35.2	4.5	13.0	15.7	76.0	44.5	13.0	48mm
C2HLB-1108	500	240	1/2	1 3/4	BROWN	21.3	27.0	146.0	57.0	39.1	5.5	13.0	15.7	76.0	44.5	13.0	55mm
C2HLB-1108A	500	240	3/8	1		21.3	27.0	116.0	57.0	39.1	5.5	10.5	9.7	46.0	25.4	13.0	55mm
C2HLB-1109	600	300	1/2	1 3/4	GREEN	23.5	30.2	147.0	57.0	43.6	6.4	13.0	15.7	76.0	44.5	14.0	55mm
C2HLB-1109A	600	300	3/8	1		23.5	30.2	117.0	57.0	43.6	6.4	10.5	9.7	46.0	25.4	14.0	55mm
C2HLB1110	750	400	1/2	1 3/4	BLACK	26.5	33.3	160.0	67.0	48.3	6.8	13.0	15.7	76.0	44.5	17.0	65mm
C2HLB-1110A	750	400	3/8	1		26.5	33.3	130.0	67.0	48.3	6.8	10.5	9.7	46.0	25.4	17.0	65mm



NOTE:

The above information corresponds to our actual knowledge and is deemed to be rendered correct and reliable. But they do not represent binding properties. Customers and end-users have to decide autonomously about the applications in the provided range. Under no circumstances Radiform Insulation Industries Pte Ltd is liable for any eventual, indirect or consequential damages arising from the sale, resale, transfer, use or misuse of the product. Our Liabilities are limited to replacing products due to manufacturing defects.